


45°エルボ

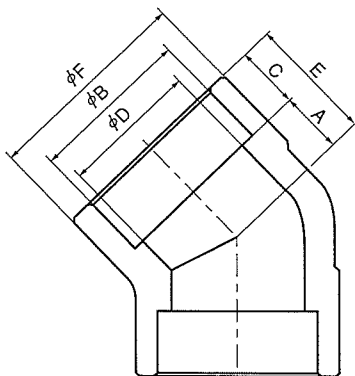

SW 45E

単位:mm

呼称	記号	B	F	C	D		A	E
					1 欄	2 欄		
A	B	Sch 80						
8 A	1/4	14.3	23.0	10.0	9.4	7.8	7.9	17.9
10A	3/8	17.8	28.0	11.0	12.7	10.9	7.9	18.9
15A	1/2	22.2	33.0	13.0	16.1	14.3	11.1	24.1
20A	3/4	27.7	38.0	14.0	21.4	19.4	12.7	26.7
25A	1	34.5	47.0	16.0	27.2	25.0	14.3	30.3
32A	1 1/4	43.2	57.0	18.0	35.5	32.9	17.5	35.5
40A	1 1/2	49.1	63.0	19.0	41.2	38.4	20.6	39.6
50A	2	61.1	76.0	22.0	52.7	49.5	25.4	47.4
65A	2 1/2	77.1	96.0	26.0	65.9	62.3	28.6	54.6
80A	3	90.0	110.0	29.0	78.1	73.9	31.8	60.8
A	B	Sch 160						
15A	1/2	22.2	38.0	14.0	12.3		12.7	26.7
20A	3/4	27.7	47.0	16.0	16.2		14.3	30.3
25A	1	34.5	57.0	18.0	21.2		17.5	35.5
32A	1 1/4	43.2	63.0	19.0	29.9		20.6	39.6
40A	1 1/2	49.1	76.0	22.0	34.4		25.4	47.4
50A	2	61.1	96.0 (84.0)	25.0 (23.0)	43.1		28.6	53.6 (51.6)
65A	2 1/2	77.1	110.0	28.0	57.3		31.8	59.8
80A	3	90.0	128.0	31.0	66.9		34.9	65.9

() 内寸法はステンレス鋼に使用する場合があります。